

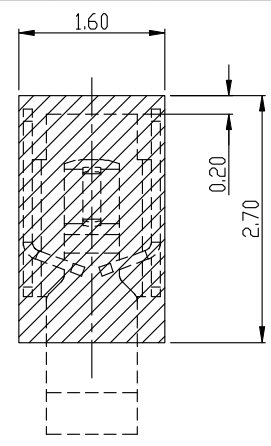

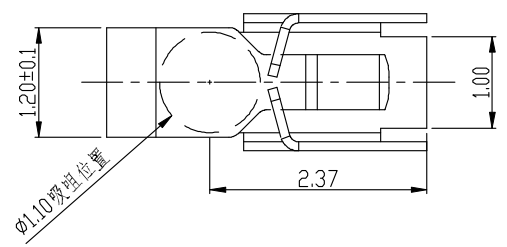
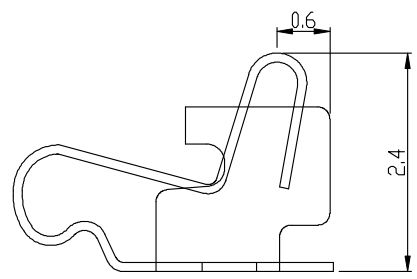
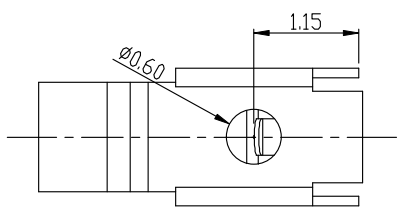


Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved

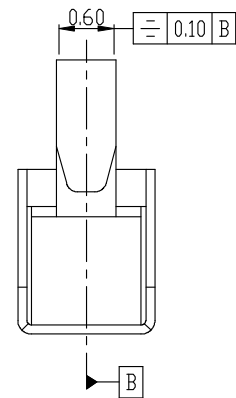

RECOMMENDED PCB LAYOUT  
TOLERANCE ±0.05MM

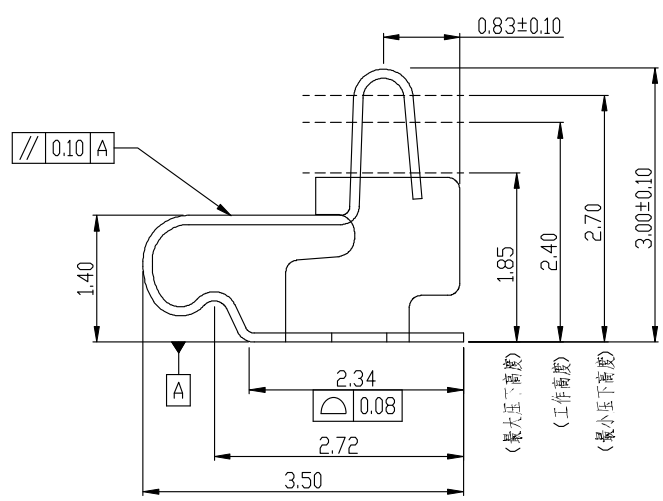

State at  
working height 2.40mm

- 技术要求:
- 1: 材质: SUS304, 厚度0.1mm,
  - 2: 表面处理:  
整体镀镍50U'', 镀金1U''
  - 3: 性能:
    - 3-1. 接触电阻: 50mΩ MAX.
    - 3-2. 使用温度: -20° C ~ +65° C.
    - 3-3. 预压弹力: 0.35N.
    - 3-4. 工作高度位置弹力: 0.8N.
  - 4: 压延毛边 < 0.05mm.
  - 5: 寿命: > 10000次
  - 6: 包装方式: 载带胶盘包装

**LANGDUN**

GENERAL TOLERANCE	XX. ±0.50	SCALE: 1:1	DRAWN	DATE	DWG. NO.	TITLE	REV. A
	X. ±0.35	X.° ±2.0°	CHECK	DATE	PARTS NO.(INTENDED USE) AS-002A		SHEET 1/1
	.X ±0.25	.X° ±1.0°	APPROVE	DATE		(CUSTOMER DRAWING)	
	.XX ±0.15	.XX° ±0.5°	UNIT: mm	SIZE: A4	RF Antenna Spring, SMT, L3.5*W1.5*H3.0mm		