

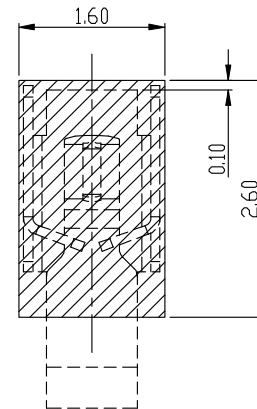
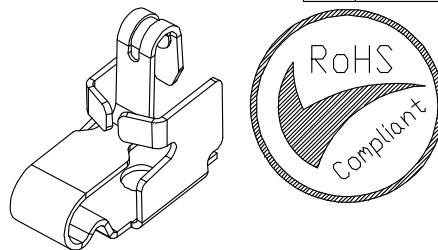
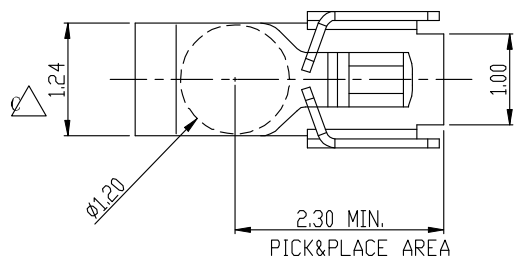
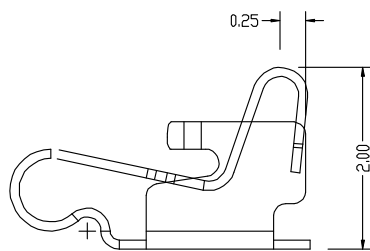


Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved
B		尺寸修改	2018. 10. 11	陈南极		
C		尺寸修改	2019. 07. 25	陈南极		

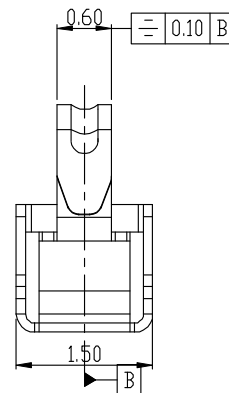

RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05MM

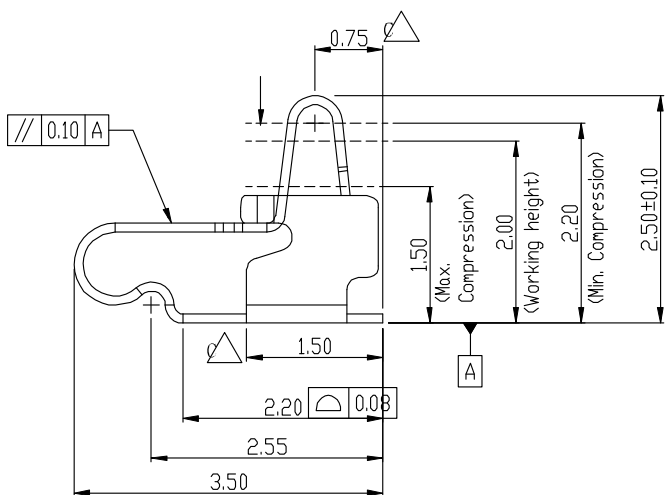

State at
working height 2.00mm

- NOTES:
- MATERIAL:
1-1: STAINLESS STEEL, T=0.10mm.
 - FINISH:
2-1: 3u" MIN. Au PLATING ON CONTACT AREA, GOLD FLASH PLATING ON SOLDER AREA, 50~150u" NICKEL UNDERPLATING OVER ALL.
 - SPECIFICATIONS:
3-1. CONTACT RESISTANCE: 50mΩ MAX.
3-2. OPERATING TEMPERATURE: -20°C~+65°C.
3-3. PRE-LOAD FORCE: 0.45N ON CONTACT POINT.
3-4. FORCE MAX. DEFLECTION: 0.70N ON CONTACT POINT.
3-5. MAX. BEAM DEFLECTION: 1.00mm. ON CONTACT POINT.
 - DURABILITY: 100 CYCLES.
 - PACKING SPECIFICATION: REEL&TAPE

由Autodesk 教育版产品制作

Autodesk

教育版产品制作

LANGDUN

GENERAL TOLERANCE	
XX. ±0.50	
X. ±0.35	X.° ±2.0°
.X ±0.25	.X° ±1.0°
.XX ±0.15	.XX° ±0.5°

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAWN	Chen	DATE	2013. 4. 03
CHECK		DATE	
APPROVE		DATE	

DWG. NO.	
PARTS NO.(INTENDED USE)	AS-003 宽尾

TITLE	RF Antenna Spring, SMT, L3.5*w1.5*H2.5mm
-------	---

REV.	B
SHEET	1/2