

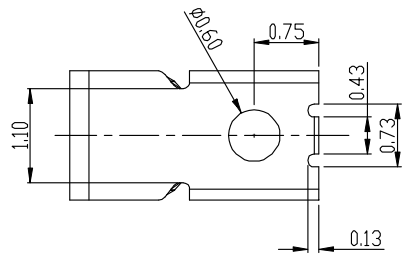

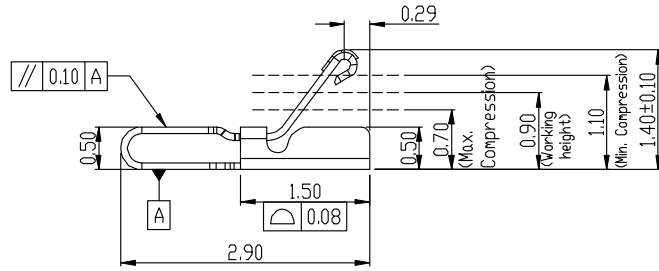
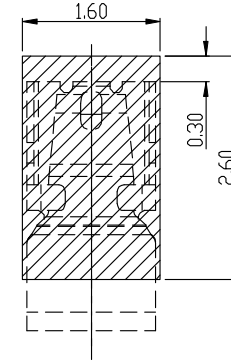


Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved

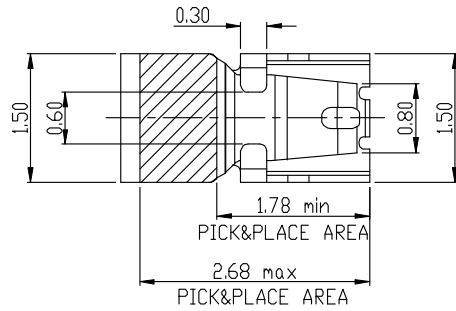

NOTES:

- 1:MATERIAL:
1-1: STAINLESS STEEL,T=0.08mm.
- 2:FINISH:
2-1: 3u" MIN. Au PLATING ON CONTACT AREA, GOLD FLASH PLATING ON SOLDER AREA, 50~150u" NICKEL UNDERPLATING OVER ALL.
- 3:SPECIFICATIONS:
3-1.CONTACT RESISTANCE:50mΩ MAX.
3-2.OPERATING TEMPERATURE: -20℃~+65℃.
3-3.PRE-LOAD FORCE:0.35N ON CONTACT POINT.
3-4.FORCE MAX. DEFLECTION:0.60N ON CONTACT POINT.
3-5.MAX.BEAM DEFLECTION:0.50mm. ON CONTACT POINT.
- 4:RF PERFORMANCE:
4-1.IMPEDANCE:50ΩHM.
4-2.VSWR: 1.5MAX.(DC~3GHz)
4-3.INSERTION LOSS: 0.6dBMAX.(DC~3GHz)
- 5:DURABILITY: 100 CYCLES.
- 6:PACKING SPECIFICATION:REEL&TAPE

LANGDUN

GENERAL TOLERANCE	
XX. ±0.50	
X. ±0.35	X.° ±2.0°
.X ±0.25	.X° ±1.0°
.XX ±0.15	.XX° ±0.5°

SCALE:	1:1
UNIT:	mm
SIZE:	A4

DRAWN	Chen	DATE	2013. 4. 03
CHECK		DATE	
APPROVE		DATE	

DWG. NO.	
PARTS NO.(INTENDED USE)	AS-011

TITLE	RF Antenna Spring,SMT, L2.9*W1.5*H1.4mm
-------	--

REV.	A
SHEET	1/2