

F

E



D

C

B

A

1



性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ




绝缘电阻: 500MΩ

工作温度: -40℃~+85℃



塑件(材质): LCP 黑色

接触点(材质): 铜合金, 镀金

2

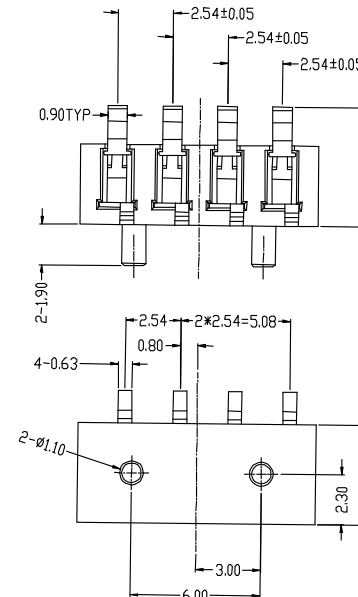

3

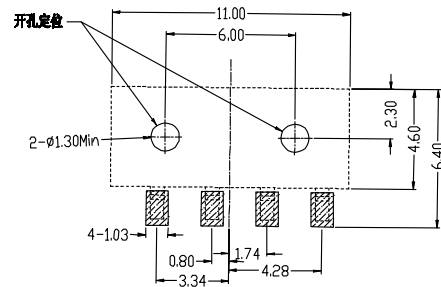

4

▨ SMT SOLDN AREA
RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.06

2	HOUSING	LCP	1	BLACK
1	CONTACT TERMINAL	BeCu	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

东莞市朗顿电子科技有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	W.M.Zhang	DWG.No.	DS-BC-005
PART NO.		BC-1-401A		CHECK	Q.L.Dai	REV.	A0
UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	22-08-2006
		ABOVE 5 TO 30	±0.3				
mm		ABOVE 30	±0.5	0°±3'	SCALE	PAGE	1 OF 1
		ANGLE	±3'				

F

E

D

C

B

A