



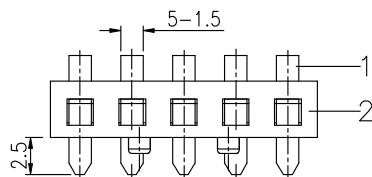


RoHS  
Compliant

SYMBOL	REVISION	APPROVAL	DATE

### SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
  - 1-1.RATING: DC 12V 3A
  - 1-2.CONTACT RESISTANCE: 20m Ω MAX(INITAL)
  - 1-3.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
  - 1-4.INSULATION RESISTANCE: 100M Ω MIN, MEASURED BY 500V DC
- FORCE:0.6mm CONTACT TRAVEL:600gf Max.
- LIFE TEST:MECHANICAL LIFE TEST 20,000 CYCLES.
- TEMPERATURE RISE : 30°C MAX

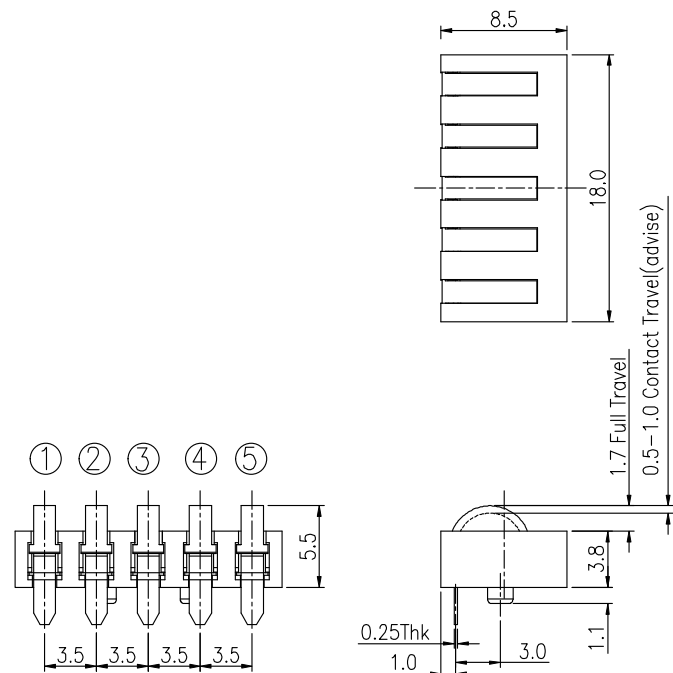

P.C.B LAYOUT

CIRCUIT

2	HOUSING	PPA	1	BLACK
1	CONTACT TERMINAL	C70350	5	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

东莞市朗顿电子科技有限公司

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING		G.C.Chen		DWG.No.		SBICL5	
PART NO.		BC-1-507		CHECK		G.C.Chen		REV.		A0	
UNIT :		TOLERANCE		ANGLE		APPROVAL		DATE		08-01-2016	
mm		OTHERWISE		0°±3'		SCALE		PAGE		1 OF 1	
UP TO 5		±0.2									
ABOVE 5 30		±0.3									
ABOVE 30		±0.5									
ANGLE		±3'									