
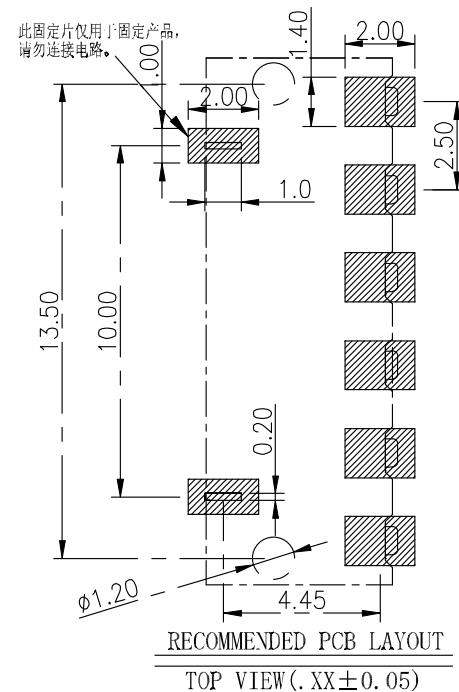
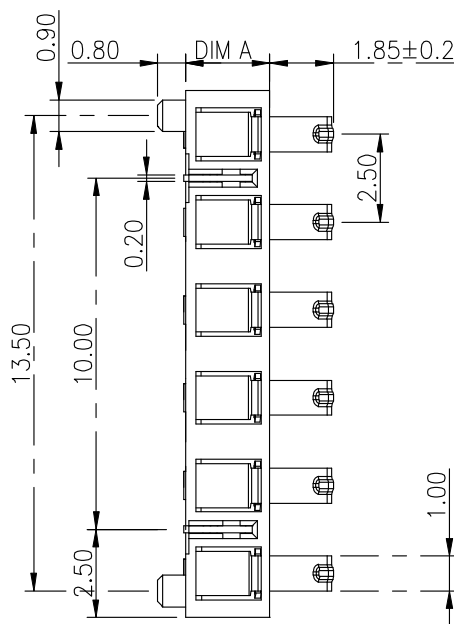


性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP
- 接触点(材质): 磷铜, 触点镀金3U"

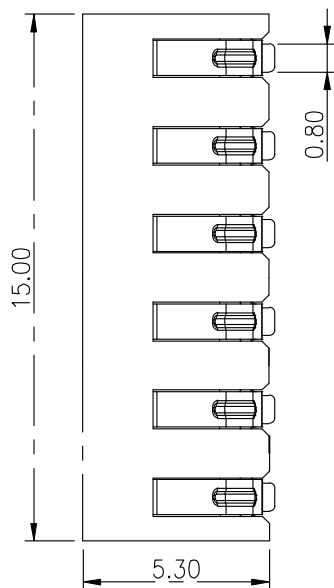

PART NO.	DIM A	DIM B						
BC-1-605	2.4	4.30±0.2	2	HOUSING	LCP	1	BLACK	
BC-1-605A	3.0	4.90±0.2	1	CONTACT TERMINAL	PHOSPHOR BRONZE	3	Au PLATED	
BC-1-605B	3.5	5.40±0.2	NO.	PARTS	MATERIAL	QTY.	FINISHING	

东莞市朗顿电子科技有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING		G.B.Wu		DWG.No.		DS-BC-114	
PART NO.		BC-1-605/605A/605B		CHECK		Q.L.Dai		REV.		A0	
UNIT : mm	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	PAGE	09-09-2017		1 OF 1	
	OTHERWISE	ABOVE 5 30 ~	±0.3					SCALE	2:1	0°±3'	