

性能:

额定电流: 0.5A

额定电压: 12V

耐电压: 500V



接触电阻: 30mΩ

绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 镀金

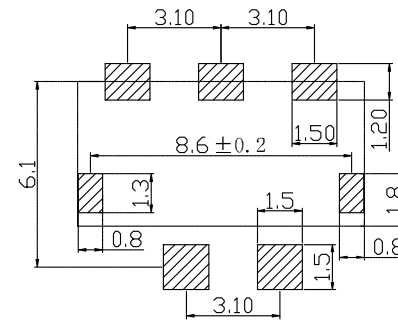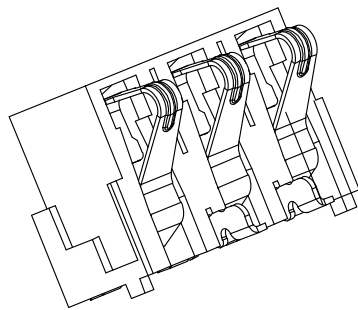

PCB Layout

2	HOUSING	LCP	1	BLACK
1	CONTACT TERMINAL	Phosphor bronze	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

东莞市朗顿电子科技有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING		G.B.Wu		DWG.No.		DS-BC-161	
PART NO.		BC-2-352		CHECK		Q.L.Dai		REV.		A0	
UNIT	:	TOLERANCE		ANGLE		APPROVAL		DATE		19-10-2017	
		OTHERWISE		0°±3'		SCALE		PAGE		1 OF 1	
mm		UP TO 5	±0.2	ANGLE			2:1				
		ABOVE 5 30 ~	±0.3								
		ABOVE 30	±0.5								
		ANGLE	±3'								