

F

E

D



C

B

A

1

1

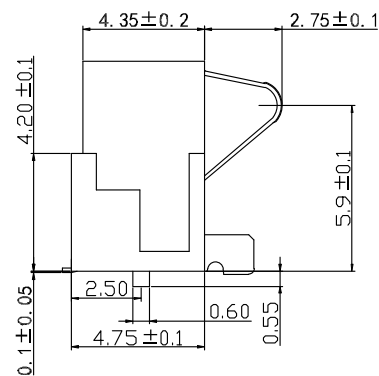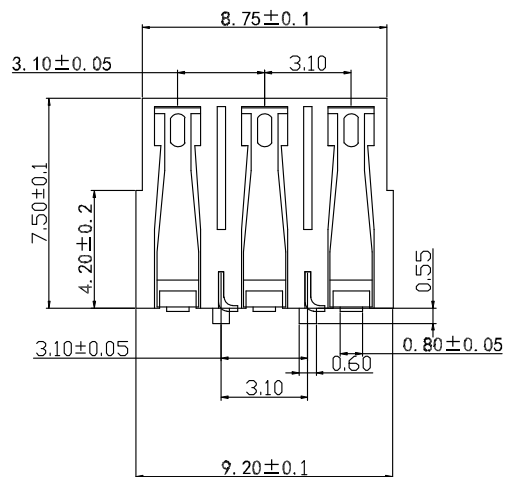

2

2

性能:

额定电流: 0.5A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ



工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 镀金

3

3

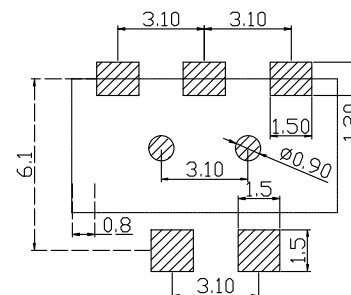

PCB Layout

4

4

| | | | | |
|-----|------------------|-----------------|------|-----------|
| 2 | HOUSING | LCP | 1 | BLACK |
| 1 | CONTACT TERMINAL | Phosphor bronze | 3 | Au PLATED |
| NO. | PARTS | MATERIAL | QTY. | FINISHING |

东莞市朗顿电子科技有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

| | | | | | | | |
|-----------|------|-----------|-------|----------|---------|------------|-----------|
| PART NAME | | CONNECTOR | | DRAWING | G.B.Wu | DWG.No. | DS-BC-162 |
| PART NO. | | BC-2-352C | | CHECK | Q.L.Dai | REV. | A0 |
| | UNIT | TOLERANCE | ANGLE | APPROVAL | DATE | 19-10-2017 | |
| | mm | OTHERWISE | 0°~3' | SCALE | PAGE | 1 OF 1 | |

F

E

D

C

B

A