
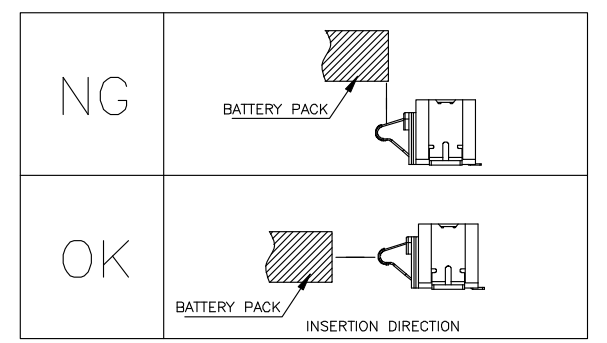


- 1.MATERIAL:
 1.1.Housing:HI-TEMP Plastic,UL94V-0,black;
 1.2.Terminal:Coppo alloy
 1.3 Latch:Coppo alloy
 2.FINISH:
 2.1 Terminal: 3 u " Au plating on contact area,
 2 u " Au plating on other area, underplated
 nickel over all.
 2.2 Latch: 2 u " Au plating on all area, underplated
 nickel over all.
 3.Electrical Performance:
 3.1 Current rating (single pin):2A MAX.
 3.2 Contact Resistance:50mΩ Max;
 3.3 Dielectric Withstanding Voltage:
 500V AC rms for 1 minut;
 3.4 Insulation Resistance:1000 MΩ Min;
 4.Mechanical Performance:
 4.1 Durability:3000 cycles;
 5.PACKING:Tape&Reel;

RECOMMENDED P.C.BOARD LAYOUT (TOP VIEW)
 TOLERANCES UNLESS OTHERWISE SPEC.±0.05
 ▨ PAD AREA

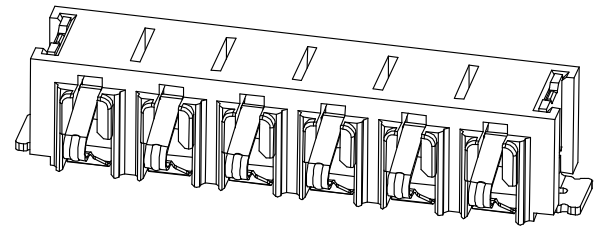

Rev.	ECN Number	Description	Drawn	Date
X1		PRELIMINARY	PING	2018/07/09

<h1>朗顿电子</h1>	GENERAL TOLERANCE		SCALE	1:1	DRAWN BY	DATE	DWG NO.	TITLE	REV
	XX. ±0.30	XXX. ° ±4°	UNIT	mm	CHECKED BY	DATE	DS-163	4.3H 6PIN BATTERY 3.0PITCH TYPE 2 FOR CUSTOMER	X1
	X. ±0.25	XX. ° ±3°	SIZE	A4	APPROVED BY	DATE	PART NO.		SHEET
	.X±0.20	X. ° ±2°					BC-2-604	1/1	
.XX±0.15	.X° ±1°								