

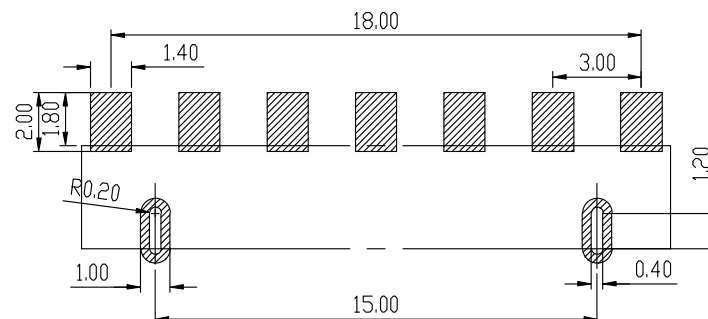


性能:  
 额定电流: 2.0A  
 额定电压: 12V  
 耐电压: 500V  
 接触电阻: 30mΩ  
 绝缘电阻: 500MΩ  
 工作温度: -40℃~+85℃  
 塑件(材质): LCP  
 接触点(材质): 磷铜, 镀金

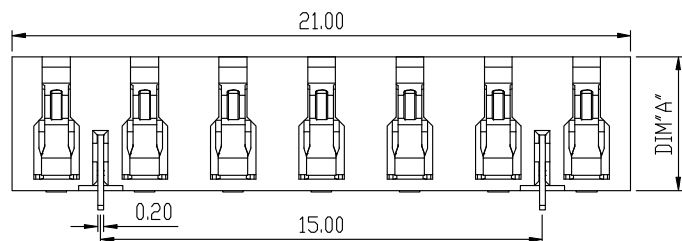

RECOMMENDED PCB LAYOUT  
 TOL:(±0.05)

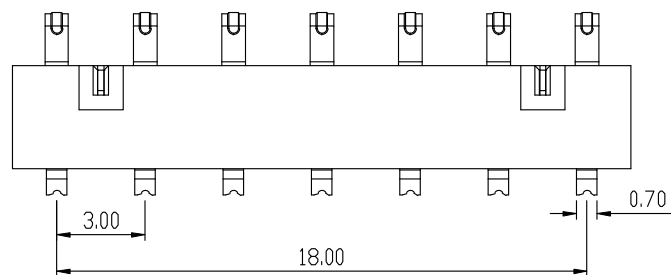

PART NO.	DIM A	DIM B
BC-2-701-C01	4.6	2.9
BC-2-701A-C01	5.0	3.3
BC-2-701B-C01	6.5	4.8
BC-2-701C-C01	7.2	5.5

2	HOUSING	LCP	1	BLACK
1	CONTACT TERMINAL	PHOSPHOR BRONZE	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

东莞市朗顿电子科技有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	G.B.Wu	DWG.No.	DS-BC-135
PART NO.		BC-2-701/701A/701B/701C-C01		CHECK	Q.L..Dai	REV.	A0
UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	19-10-2019
mm	OTHERWISE	ABOVE 5	±0.3	0°±3'	SCALE	PAGE	1 OF 1
		ABOVE 30	±0.5		2:1		
		ANGLE	±3'				