

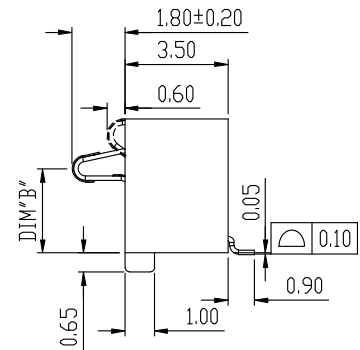
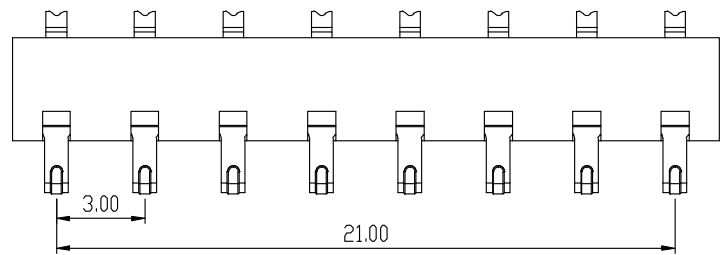



F E D C B A

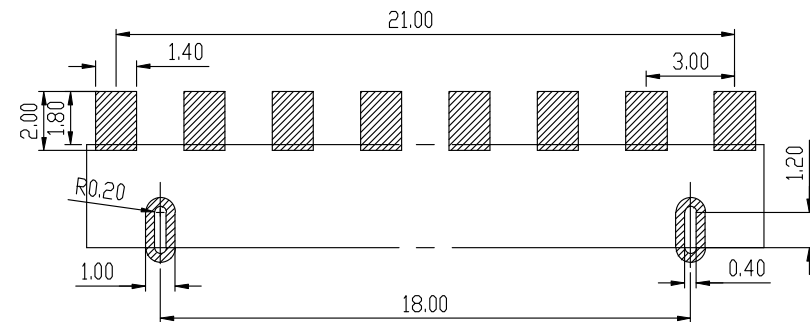

性能:
 额定电流: 2.0A
 额定电压: 12V
 耐电压: 500V
 接触电阻: 30mΩ
 绝缘电阻: 500MΩ
 工作温度: -40°C~+85°C
 塑件(材质): LCP
 接触点(材质): 磷铜, 镀金

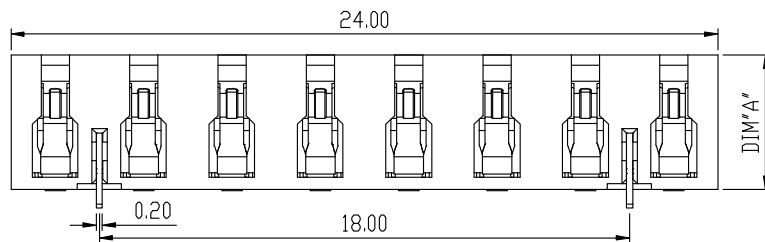

RECOMMENDED PCB LAYOUT
 TOL:(±0.05)

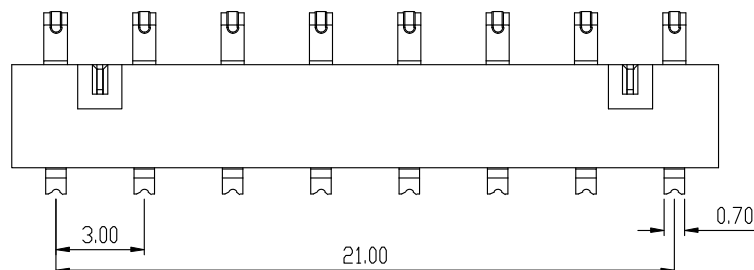

| PART NO. | DIM A | DIM B |
|---------------|-------|-------|
| BC-2-801-C01 | 4.6 | 2.9 |
| BC-2-801A-C01 | 5.0 | 3.3 |
| BC-2-801B-C01 | 6.5 | 4.8 |
| BC-2-801C-C01 | 7.2 | 5.5 |

| | | | | |
|-----|------------------|-----------------|------|-----------|
| 2 | HOUSING | LCP | 1 | BLACK |
| 1 | CONTACT TERMINAL | PHOSPHOR BRONZE | 3 | Au PLATED |
| NO. | PARTS | MATERIAL | QTY. | FINISHING |

东莞市朗顿电子科技有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

| PART NAME | | CONNECTOR | | DRAWING | G.B.Wu | DWG.No. | DS-BC-135 |
|-----------|-----------|-----------------------------|------|----------|----------|---------|------------|
| PART NO. | | BC-2-801/801A/801B/801C-C01 | | CHECK | Q.L..Dai | REV. | A0 |
| UNIT : | TOLERANCE | UP TO 5 | ±0.2 | APPROVAL | DATE | PAGE | 19-10-2019 |
| | OTHERWISE | ABOVE 5 TO 30 | ±0.3 | | | | |
| mm | | ABOVE 30 | ±0.5 | SCALE | 2:1 | 1 OF 1 | |
| | | ANGLE | ±3' | | | | |

F E D C B A