







Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved





技术要求:

1. 材质: 不锈钢SUS301, $T=0.15\pm 0.005$;
2. 端子锡脚焊接面和接触面不可有毛边, 其他部位毛边最大0.03mm;
3. 扭曲: $45^\circ/1000\text{mm}$, 拱形 $5\text{mm}/1000\text{mm}$;
4. 标示有“ ”符号的为重点控制和检验尺寸;
5. 未标注之 ∇ MAX R0.13;
6. 电镀须满足48小时盐雾测试;
7. 寿命测试 > 2万次, 产品弹力要求在60gf~80gf之间
8. 镀底50~80u"min, 焊接区域镀金, 接触区域镀金1U"MIN



焊盘尺寸
尺寸公差 ±0.05

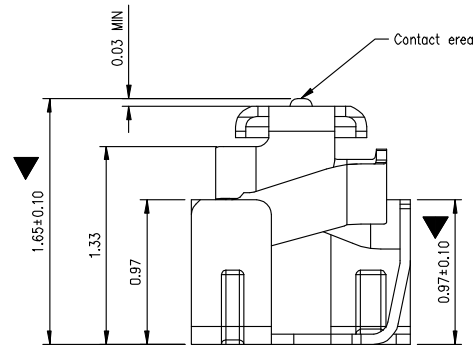

LANGDUN

GENERAL TOLERANCE

XX. ±0.50	$X^\circ \pm 2.0^\circ$
X. ±0.35	$.X^\circ \pm 1.0^\circ$
.X ±0.25	$.XX^\circ \pm 0.5^\circ$
.XX ±0.15	

SCALE: 1:1

UNIT: mm

SIZE: A4

DRAWN

CHECK

APPROVE

DATE

DATE

DATE

DWG. NO.

PARTS NO.(INTENDED USE)
AS-016

TITLE

客户图

RF Antenna Spring,SMT,
L1.45*W1.45*H1.60mm

REV.

A

SHEET

1/1