

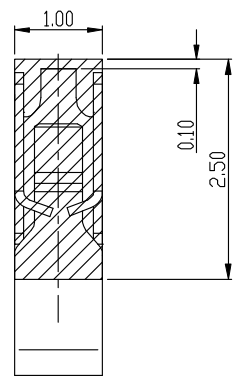

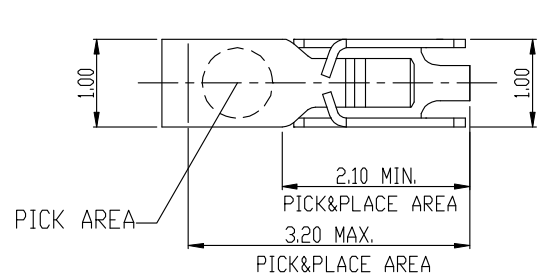
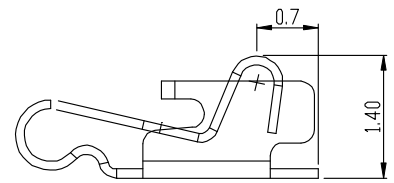


Rev.	ECN Number	Description	Date	Drawn	Checkd	Approved



RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05MM

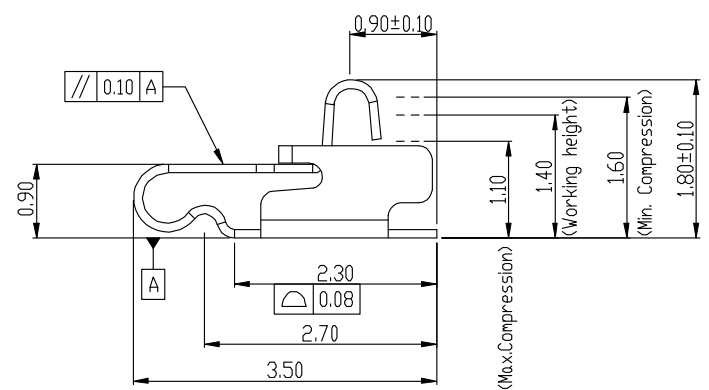

State at
working height 1.40mm

- NOTES:
- MATERIAL:
1-1: STAINLESS STEEL, T=0.10mm.
 - FINISH:
2-1: 3u" MIN. Au PLATING ON CONTACT AREA,
GOLD FLASH PLATING ON SOLDER AREA,
50~150u" NICKEL UNDERPLATING OVER ALL.
 - SPECIFICATIONS:
3-1.CONTACT RESISTANCE:50mΩ MAX.
3-2.OPERATING TEMPERATURE: -20℃~+65℃.
3-3.PRE-LOAD FORCE:0.35N ON CONTACT POINT.
3-4.FORCE MAX. DEFLECTION:0.60N ON CONTACT POINT.
3-5.MAX.BEAM DEFLECTION:0.70mm. ON CONTACT POINT.
 - RF PERFORMANCE:
4-1.IMPEDANCE:50ΩHM.
4-2.VSWR: 1.5MAX.(DC~3GHz)
4-3.INSERTION LOSS: 0.6dBMAX.(DC~3GHz)
 - DURABILITY: 100 CYCLES.
 - PACKING SPECIFICATION:REEL&TAPE

LANGDUN

GENERAL TOLERANCE	
XX. ±0.50	
X. ±0.35	X.° ±2.0°
.X ±0.25	.X° ±1.0°
.XX ±0.15	.XX° ±0.5°

SCALE: 1:1

UNIT: mm

SIZE: A4

DRAWN	DATE	DWG. NO.
CHECK	DATE	
APPROVE	DATE	

PARTS NO.(INTENDED USE)
AS-017

TITLE
客户图
RF Antenna Spring,SMT,
L3.50*W1.0*H1.8mm

REV. A

SHEET 1/1