
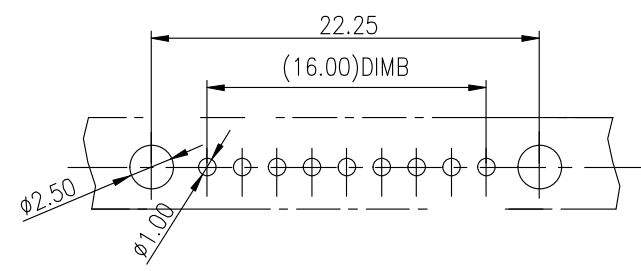
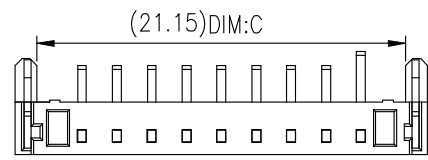

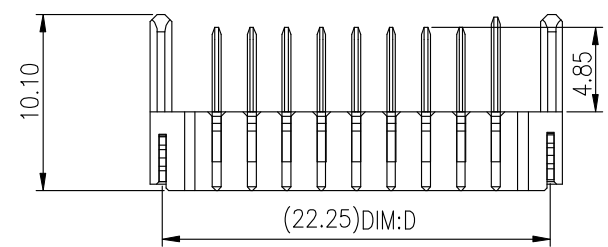


| REV. | DESCRIPTION | DRAW. | DATE. |
|------|-------------|-------|-------|
| 01 | 新发行图面 | Elih | |

| No:of pins | Dimension | | | |
|------------|-----------|-------|-------|-------|
| | DIM.A | DIM.B | DIM.C | DIM.D |
| 03 | 11.65 | 4.00 | 9.15 | 10.25 |
| 04 | 13.65 | 6.00 | 11.15 | 12.25 |
| 05 | 15.65 | 8.00 | 13.15 | 14.25 |
| 06 | 17.65 | 10.00 | 15.15 | 16.25 |
| 07 | 19.65 | 12.00 | 17.15 | 18.25 |
| 08 | 21.65 | 14.00 | 19.15 | 20.25 |
| 09 | 23.65 | 16.00 | 21.15 | 22.25 |
| 10 | 25.65 | 18.00 | 23.15 | 24.25 |
| 11 | 27.65 | 20.00 | 25.15 | 26.25 |
| 12 | 29.65 | 22.00 | 27.15 | 28.25 |

NOTE:
Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:5A
instant CURRENT:7A
Contact Resistance:30MΩ
Insulation Resistance:100MΩ
Dielectric Voltage:500V
Operdting Temperature:-40°~105°

东莞市朗顿电子科技有限公司

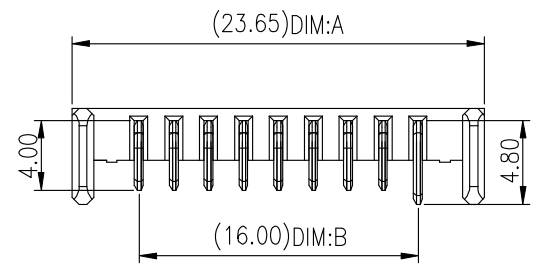

Recommended P.C.B Layout

UNLESS OTHERWISE SPECIFIED,TOLERANCE:
X: ±0.20
X.x ±0.10
X.xx ±0.05
ANGULAR ±2°

| | | | | |
|------------|-------------------|----------|---|----------|
| DESIGN | Elih | DATE | TITLE: BATTERY 2.0PITCH MALE BOARD TO BOARD CONNECTOR | |
| APPROVED | | DATE | | |
| PART NO | LD-A01M-A-M2-M3-X | REV: 01 | SCALE: 1:1 | UNIT: mm |
| DRAWING NO | LD-A01M-A-M2-M3-X | SIZE: A4 | SHEET: 1/1 | |