



RoHS  
Compliant

SYMBOL	REVISION	APPROVAL	DATE

### SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
  - 1-1. RATING: DC 12V 5A/Pin
  - 1-2. CONTACT RESISTANCE: 30mΩ MAX(INITIAL)
  - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
  - 1-4. INSULATION RESISTANCE: 500MΩ MIN, MEASURED BY 500V DC
- LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES.
- TEMPERATURE RISE : 30° C MAX

No. of Pins	Dimension			
	DIM A	DIM B	DIM C	DIM D
2Pin	8.50	6.00	2.00	5.00
3Pin	10.50	8.00	4.00	7.00
4Pin	12.50	10.00	6.00	9.00
5Pin	14.50	12.00	8.00	11.00
6Pin	16.50	14.00	10.00	13.00
7Pin	18.50	16.00	12.00	15.00
8Pin	20.50	18.00	14.00	17.00
9Pin	22.50	20.00	16.00	19.00
10Pin	24.50	22.00	18.00	21.00
11Pin	26.50	24.00	20.00	23.00
12Pin	28.50	26.00	22.00	25.00
13Pin	30.50	28.00	24.00	27.00
14Pin	32.50	30.00	26.00	29.00
15Pin	34.50	32.00	28.00	31.00
16Pin	36.50	34.00	30.00	33.00

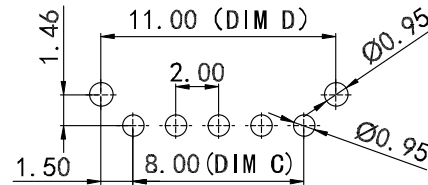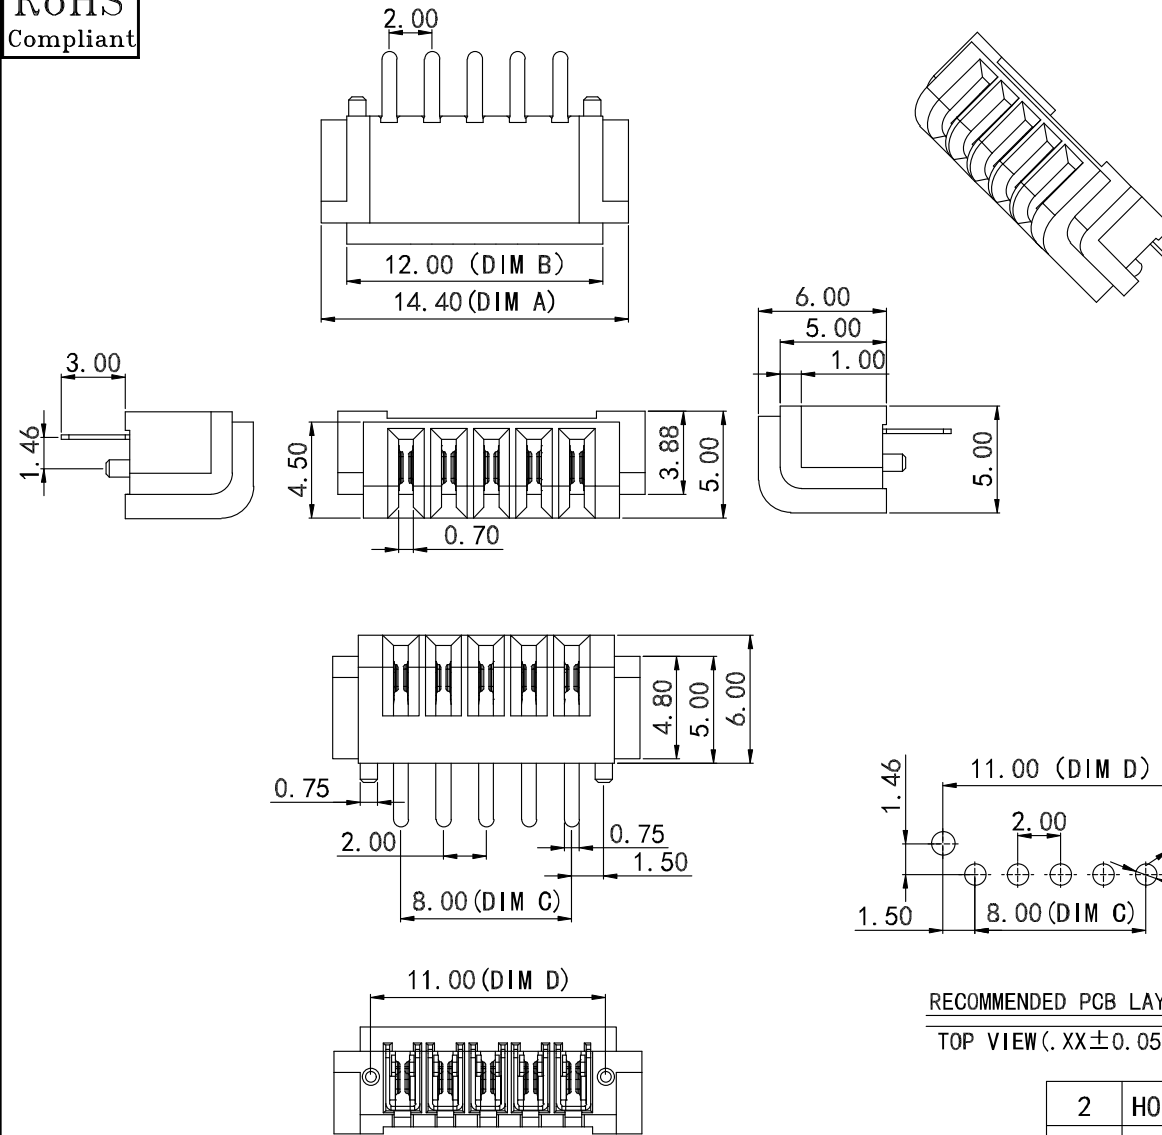

RECOMMENDED PCB LAYOUT  
TOP VIEW (.XX±0.05)

2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	PHOSPHOR BRONZE	5	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

东莞市朗顿电子科技有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	CONNECTOR		DRAWING	Y. C. Zhang	DWG. No.
PART NO.	母座LD-A11F-C-S2 系列		CHECK	G. C. Chen	REV. A1
UNIT : mm	TOLERANCE	X.X ±0.15 X.X* ±1°	APPROVAL	DATE	10-10-2021
	OTHERWISE	X.X ±0.10 X.X* ±0.5°			
		X.XX ±0.05 X.XX ±0.05°	SCALE	3:1	PAGE
		X.XXX ±0.005 X.XXX ±0.005°			1 OF 1