

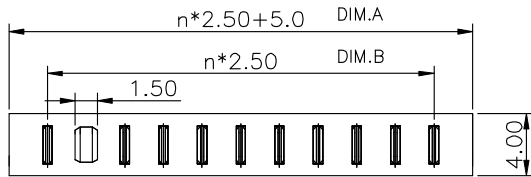


REV.	DESCRIPTION	DRAW.	DATE.




NOTE:

1. MATERIAL:
  - 1.1 HOUSING: LCP, UL 94V-0
  - 1.2 TERMINAL: C2680
2. FINISH:
  - 2.1 TERMINAL: NICKEL 50 μm MIN UNDER PLATED OVERALL, Au PLATED ON THE CONTACT AREA. OR Tin ON THE SOLDERING AREA.
3. PRODUCT SPECIFICATION
  - 3.1 CURRENT RATING :5A
  - 3.2 VOLTAGE RATING : 30V AC
  - 3.3 DIELECTRIC WITHSTANDING VOLTAGE:500VAC
  - 3.4 INSULATION RESISTANCE: 100MΩ min.
  - 3.5 CONTACT RESISTANCE: 30mΩ Max.
  - 3.6 Operating Temperature: -40° ~105°

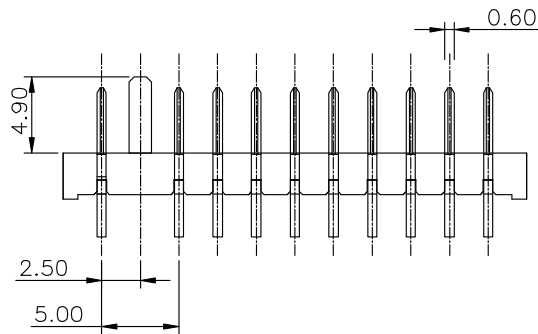

No. of Pins	Dimension	
	DIM.B	DIM.A
02	5.00	10.00
03	7.50	12.50
04	10.00	15.00
05	12.50	17.50
06	15.00	20.00
07	17.50	22.50
08	20.00	25.00
09	22.50	27.50
10	25.00	30.00

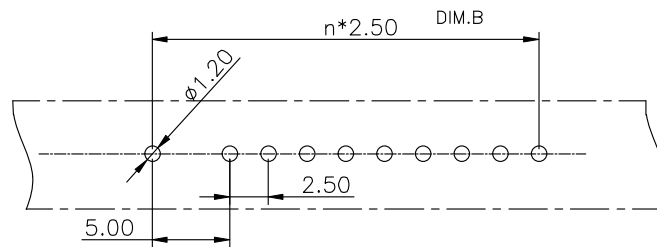

RECOMMENDED PCB LAYOUT  
T=1.2MM,TOLERANCES±0.05MM

## 东莞市朗顿电子科技有限公司

UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.5 X.x ±0.35 X.xx ±0.25 ANGULAR ±2°	DESIGN	Y.Q.H	DATE	2014.08.26	TITLE:	
	APPROVED		DATE		ID-B02M-A-R1	
	PART NO		REV: 01		SCALE: 1:1	UNIT: MM
	DRAWING NO		SIZE: A4		SHEET: 1/1	