


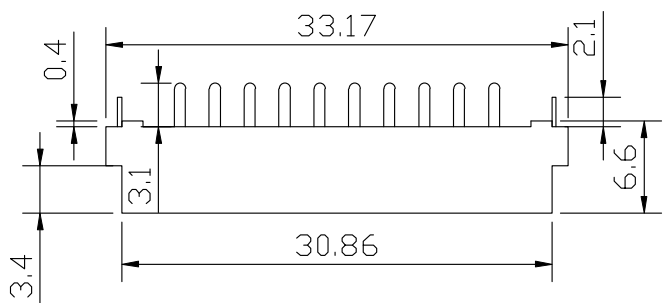
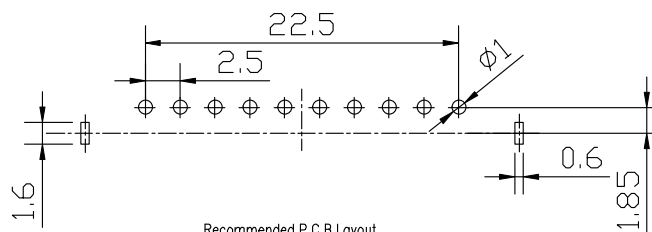
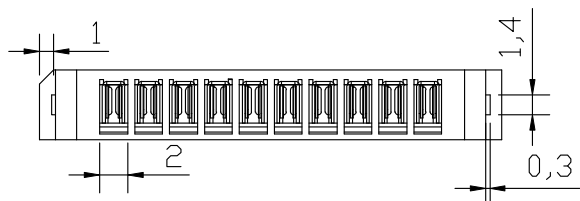


RoHS
Compliant


SYMBOL	REVISION	APPROVAL	DATE



Material
 Insulator: Nylon 9T(UL94V-0)
 TERMINAL: phosphor Bronze
 TERMINAL Plated: Gold over Nickel or Tin
 Specification
 Current rating: 7A
 instant CURRENT: 10A
 Contact Resistance: 30mΩ
 Insulation Resistance: 100MΩ
 Dielectric Voltage: 500V
 Operdting Temperature: -40°~105°

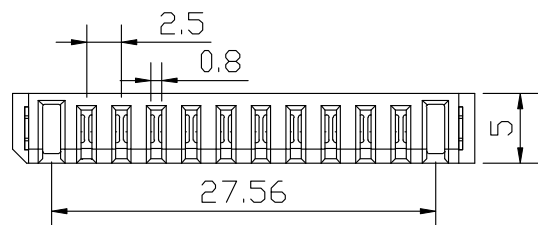

Recommended P.C.B Layout
 Layout Tolerance=+/-0.05mm

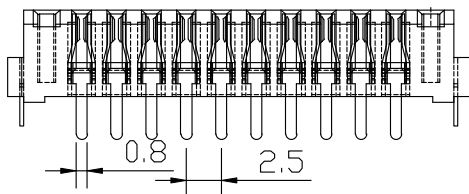

NO.	PARTS	MATERIAL	QTY.	FINISHING
2	HOUSING	NYLON 9T	1	BLACK
1	CONTACT TERMINAL	PHOSPHOR BRONZE	9	Au PLATED

东莞市朗顿电子科技有限公司

PART NAME		CONNECTOR		DRAWING	Y.C.Zhang	DWG.No.	
PART NO.		LD-B28F-10P-S2		CHECK	G.C.Chen	REV.	A1
UNIT:	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	01-07-2016
mm	OTHERWISE	ABOVE 5 30	±0.3	0°±3°	SCALE	2:1	PAGE
		ABOVE 30	±0.5				1 OF 1
		ANGLE	±3°				

COPYRIGHT RESERVED, PLEASE DO NOT COPY.