

F




E

D




C

B

A

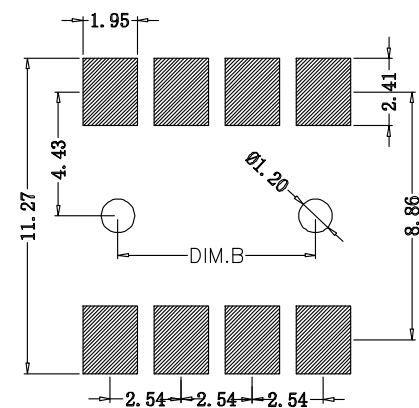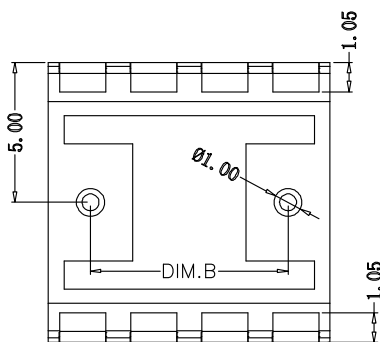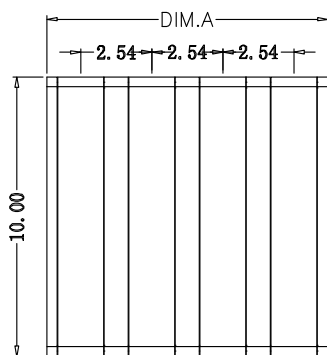

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

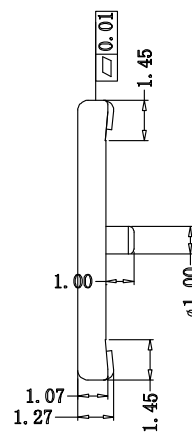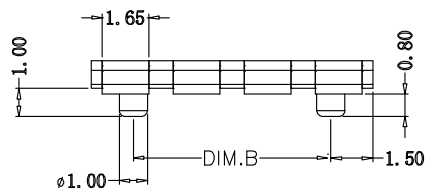

性能:

1. 额定电流: 3.0A
2. 额定电压: 60V
3. 耐电压: 500V
4. 接触电阻: 30 mΩ
5. 绝缘电阻: 500mΩ
6. 工作温度: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
7. 使用寿命: 10000次以上
8. 胶件 (材质) PA9T
9. 接触点 (材质): 黄铜C2680, 镀金

规格

DIM A

DIM B

BC-0-201	4.98	1.98
BC-0-301	7.52	4.52
BC-0-402	10.06	7.06
BC-0-501	12.60	9.60
BC-0-604	15.14	12.14
BC-0-702	17.68	14.68
BC-0-802	20.22	17.22
BC-0-901	22.76	19.76
BC-0-1001	25.30	22.30

2	HOUSING	PA9T	1	BLACK
1	CONTACT TERMINAL	BRASS	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

东莞市朗顿电子科技有限公司

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING		G.B.Wu		DWG.No.		DS-BC-107	
PART NO.		BC-0-201 301 402 501 604 702 802 901 1001		CHECK		Q.L.Dai		REV.		A0	
UNIT		TOLERANCE		ANGLE		APPROVAL		DATE		28-08-2017	
mm		OTHERWISE		$0^{\circ}\pm 3'$		SCALE		PAGE		1 OF 1	
		UP TO 5									
		ABOVE 5 30 ~									
		ABOVE 30									
		OTHERWISE									

F

E

D

C

B

A