
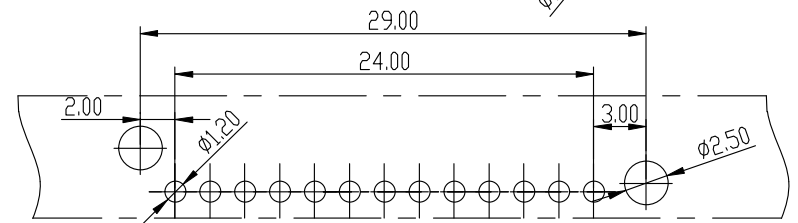
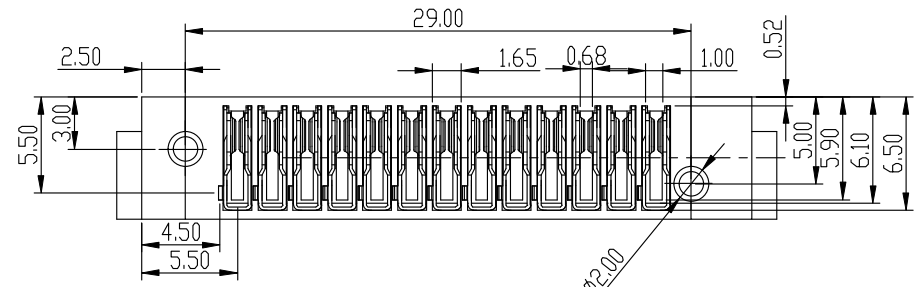
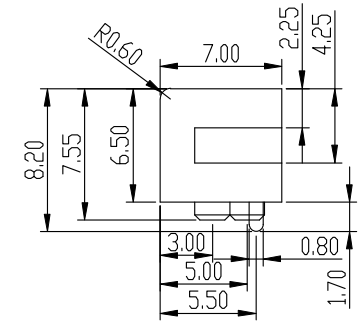
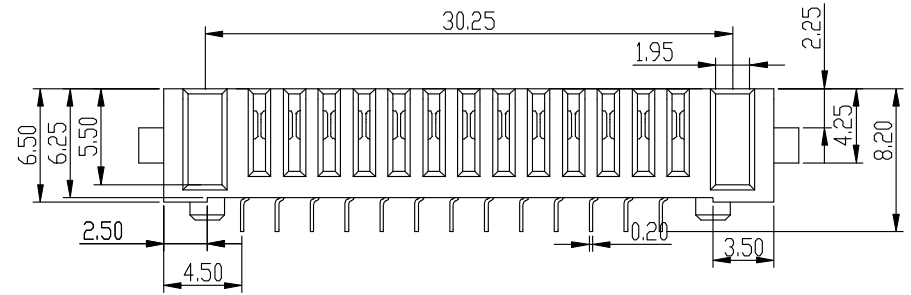


REV.	DESCRIPTION	DRAW.	DATE.

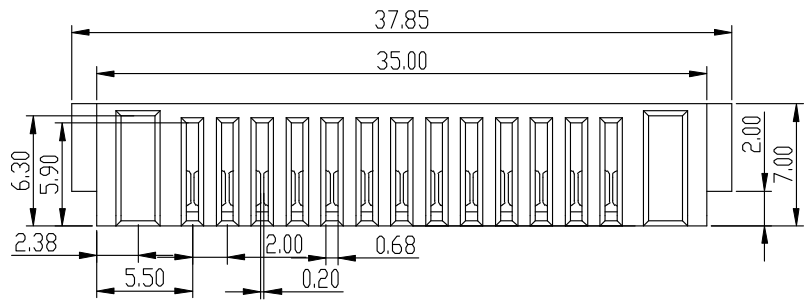

Recommended P.C.B Layout

Material
 Insulator : Nylon 9T (UL94V-0)
 Contact : Phosphor Bronze
 Contact Plated : Gold over Nickel or Tin
 Specification
 Current Rating : 5A
 Instant Current : 7A
 Contact Resistance : 30mΩ
 Insulation Resistance : 100MΩ
 Dielectric Voltage : 500V
 Operating Temperature : -40°~105°

东莞市朗顿电子科技有限公司

UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.20 X.x ±0.15 X.xx ±0.10 ANGULAR ±2°	DESIGN		DATE		TITLE: BATTERY FEMALE 2.0PITCH BOARD TO BOARD CONNECTOR	
	APPROVED		DATE			
	PART NO	LD-A01F-13P-H1	REV:	01	SCALE: 1:1	UNIT: mm
	DRAWING NO	LD-A01F-13P-H1	SIZE:	A4	SHEET: 1/1	